


## HOT-PEEL DTF FILM

### PROPERTIES

Article number	HCS075/2-DTF-HP
Available roll width	30 cm, 60 cm
Available roll length	100 m
Base material	PET Film
Coating silkscreen	Two sided matt and one sided release coated
Compatible inks	Water-based
OEKO-TEX® Certified	Yes
Peel force	Medium
Printing side	Outside
Peel type	Hot-peel
Pressing instructions	140 °C – 10 seconds
Stability	Thermo stabilised with anti-static treatment
Thickness base film	75 micron
Transfer finish	Matt

### USP's

- Matt finish
- Available in rolls of 30 and 60 cm for DTF printers
- Hot-Peel

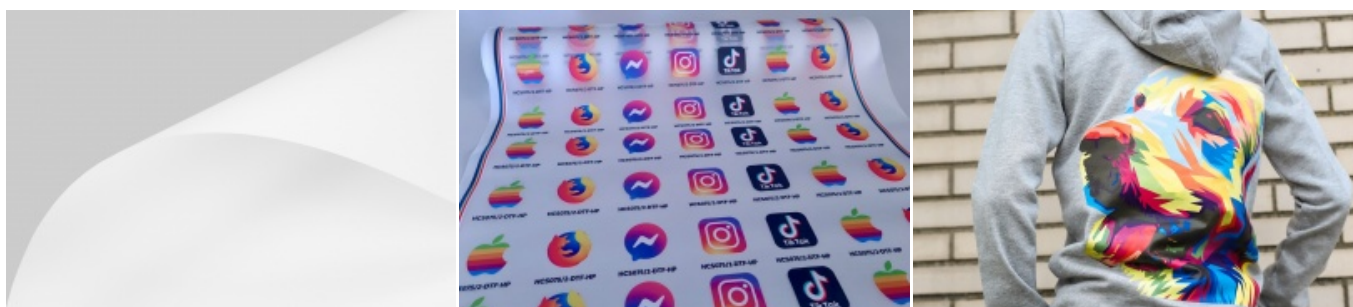

**Notice:** TTS' products must be tested to determine the suitability of the product in combination with your equipment and methods of use. TTS maximum obligation shall be to replace any product supplied by TTS, which has been proven to be defective. TTS is not liable for any injury, direct or consequential, arising from the use of, or the inability to use our products.

The above mentioned data are according to the latest state and are non-binding. For all technical data is a valid tolerance of 5%. We reserve the right for technical modifications.